



STATE OF NORTH CAROLINA  
DEPARTMENT OF TRANSPORTATION

ROY COOPER  
GOVERNOR

J. ERIC BOYETTE  
SECRETARY

June 15, 2023

**Addendum No. 2**

RE: Contract # C204838

WBS # 39062.3.2

STATE FUNDED

**Edgecombe County (U-4424)**

NC-111 (WILSON ST) FROM US-64 ALT (WESTERN BLVD) TO NC-122 (MCNAIR RD) IN TARBORO.

**June 20, 2023 Letting**

To Whom It May Concern:

Reference is made to the proposal and plans furnished to you on this project.

The following revision has been made to the Structures Plans.

Sheet No.	Revision
S-1	Boxed note with double asterisks on the right side of the sheet has been revised to allow for the use of steel sheet piling.

Please void the above listed Sheet in your Plans and staple the revised Sheet thereto.

The contract will be prepared accordingly.

Sincerely,

DocuSigned by:  
*Ronald Elton Davenport, Jr.*  
F81B6038A47A442...

Ronald E. Davenport, Jr., PE  
State Contract Officer

RED/cms  
Attachments

Mailing Address:  
NC DEPARTMENT OF TRANSPORTATION  
CONTRACT STANDARDS AND DEVELOPMENT  
1591 MAIL SERVICE CENTER  
RALEIGH, NC 27699-1591

Telephone: (919) 707-6900  
Fax: (919) 250-4127  
Customer Service: 1-877-368-4968

Location:  
1020 BIRCH RIDGE DR.  
RALEIGH, NC 27610


Website: [www.ncdot.gov](http://www.ncdot.gov)

cc: Mr. Boyd Tharrington, PE  
Mr. Keith Eason, PE  
Mr. Ken Kennedy, PE  
Mr. Mike Gwyn  
Project File (2)

Mr. Forrest Dungan, PE  
Ms. Jaci Kincaid  
Mr. Jon Weathersbee, PE

64+00 +50 65+00 +50 66+00 +50 67+00 +50 68+00 +50

NOTES  
FOR GENERAL NOTES, SEE SHEET 3 OF 3.

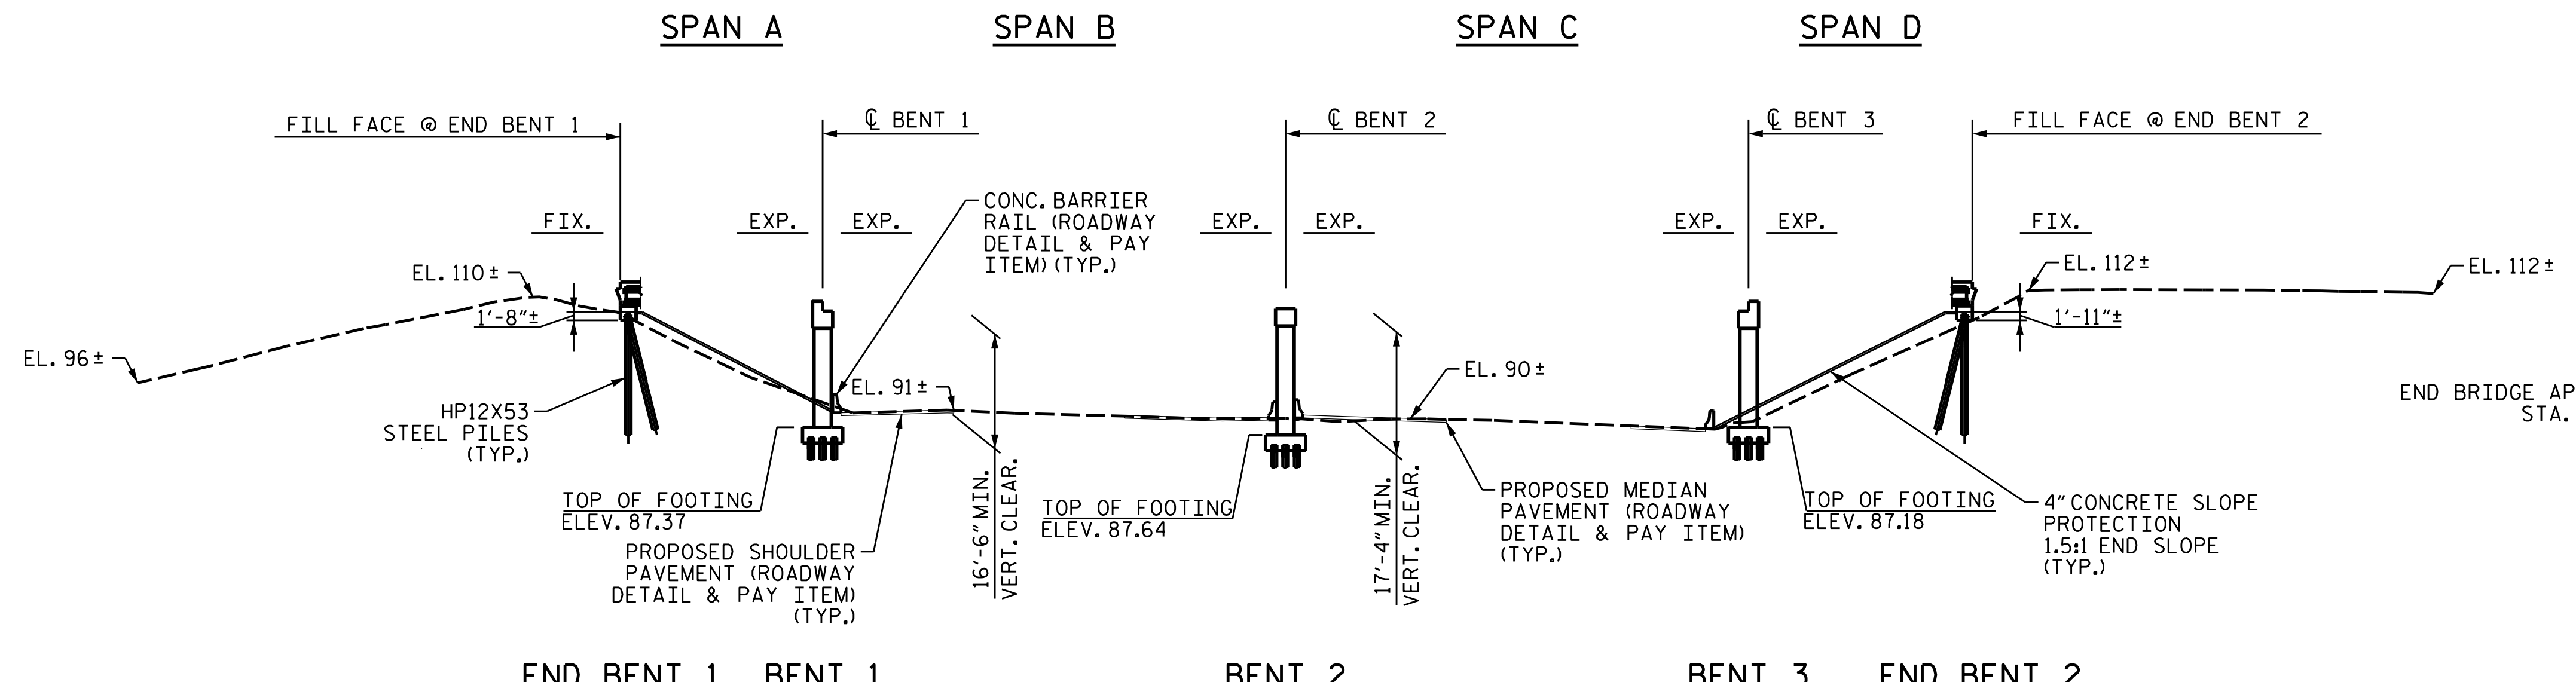

BEGIN BRIDGE APPROACH SLAB  
STA. 64+94.20 -L-  
EL. 112.36

(+)4.4349% (-)0.7475%

PI STA = 63+35.00 -L-  
EL = 111.16  
VC = 310'

(-)0.9968% (-)4.1104%

PI STA = 69+10.00 -L-  
EL = 110.86  
VC = 300'

**GRADE DATA -L-**

END BRIDGE APPROACH SLAB  
STA. 67+59.79 -L-  
EL. 112.36


CL JOINT @ BENT 2

(+)4.000% (-)4.000%

VC = 760'

**SECTION THROUGH WIDENING**  
(SECTION 20.00' RIGHT OF -L-)  
(SECTION TAKEN AT RIGHT ANGLES TO END BENTS AND BENTS)

**EXISTING GRADE DATA -L-**  
(FOR INFORMATION ONLY  
FROM EXISTING BRIDGE PLANS)

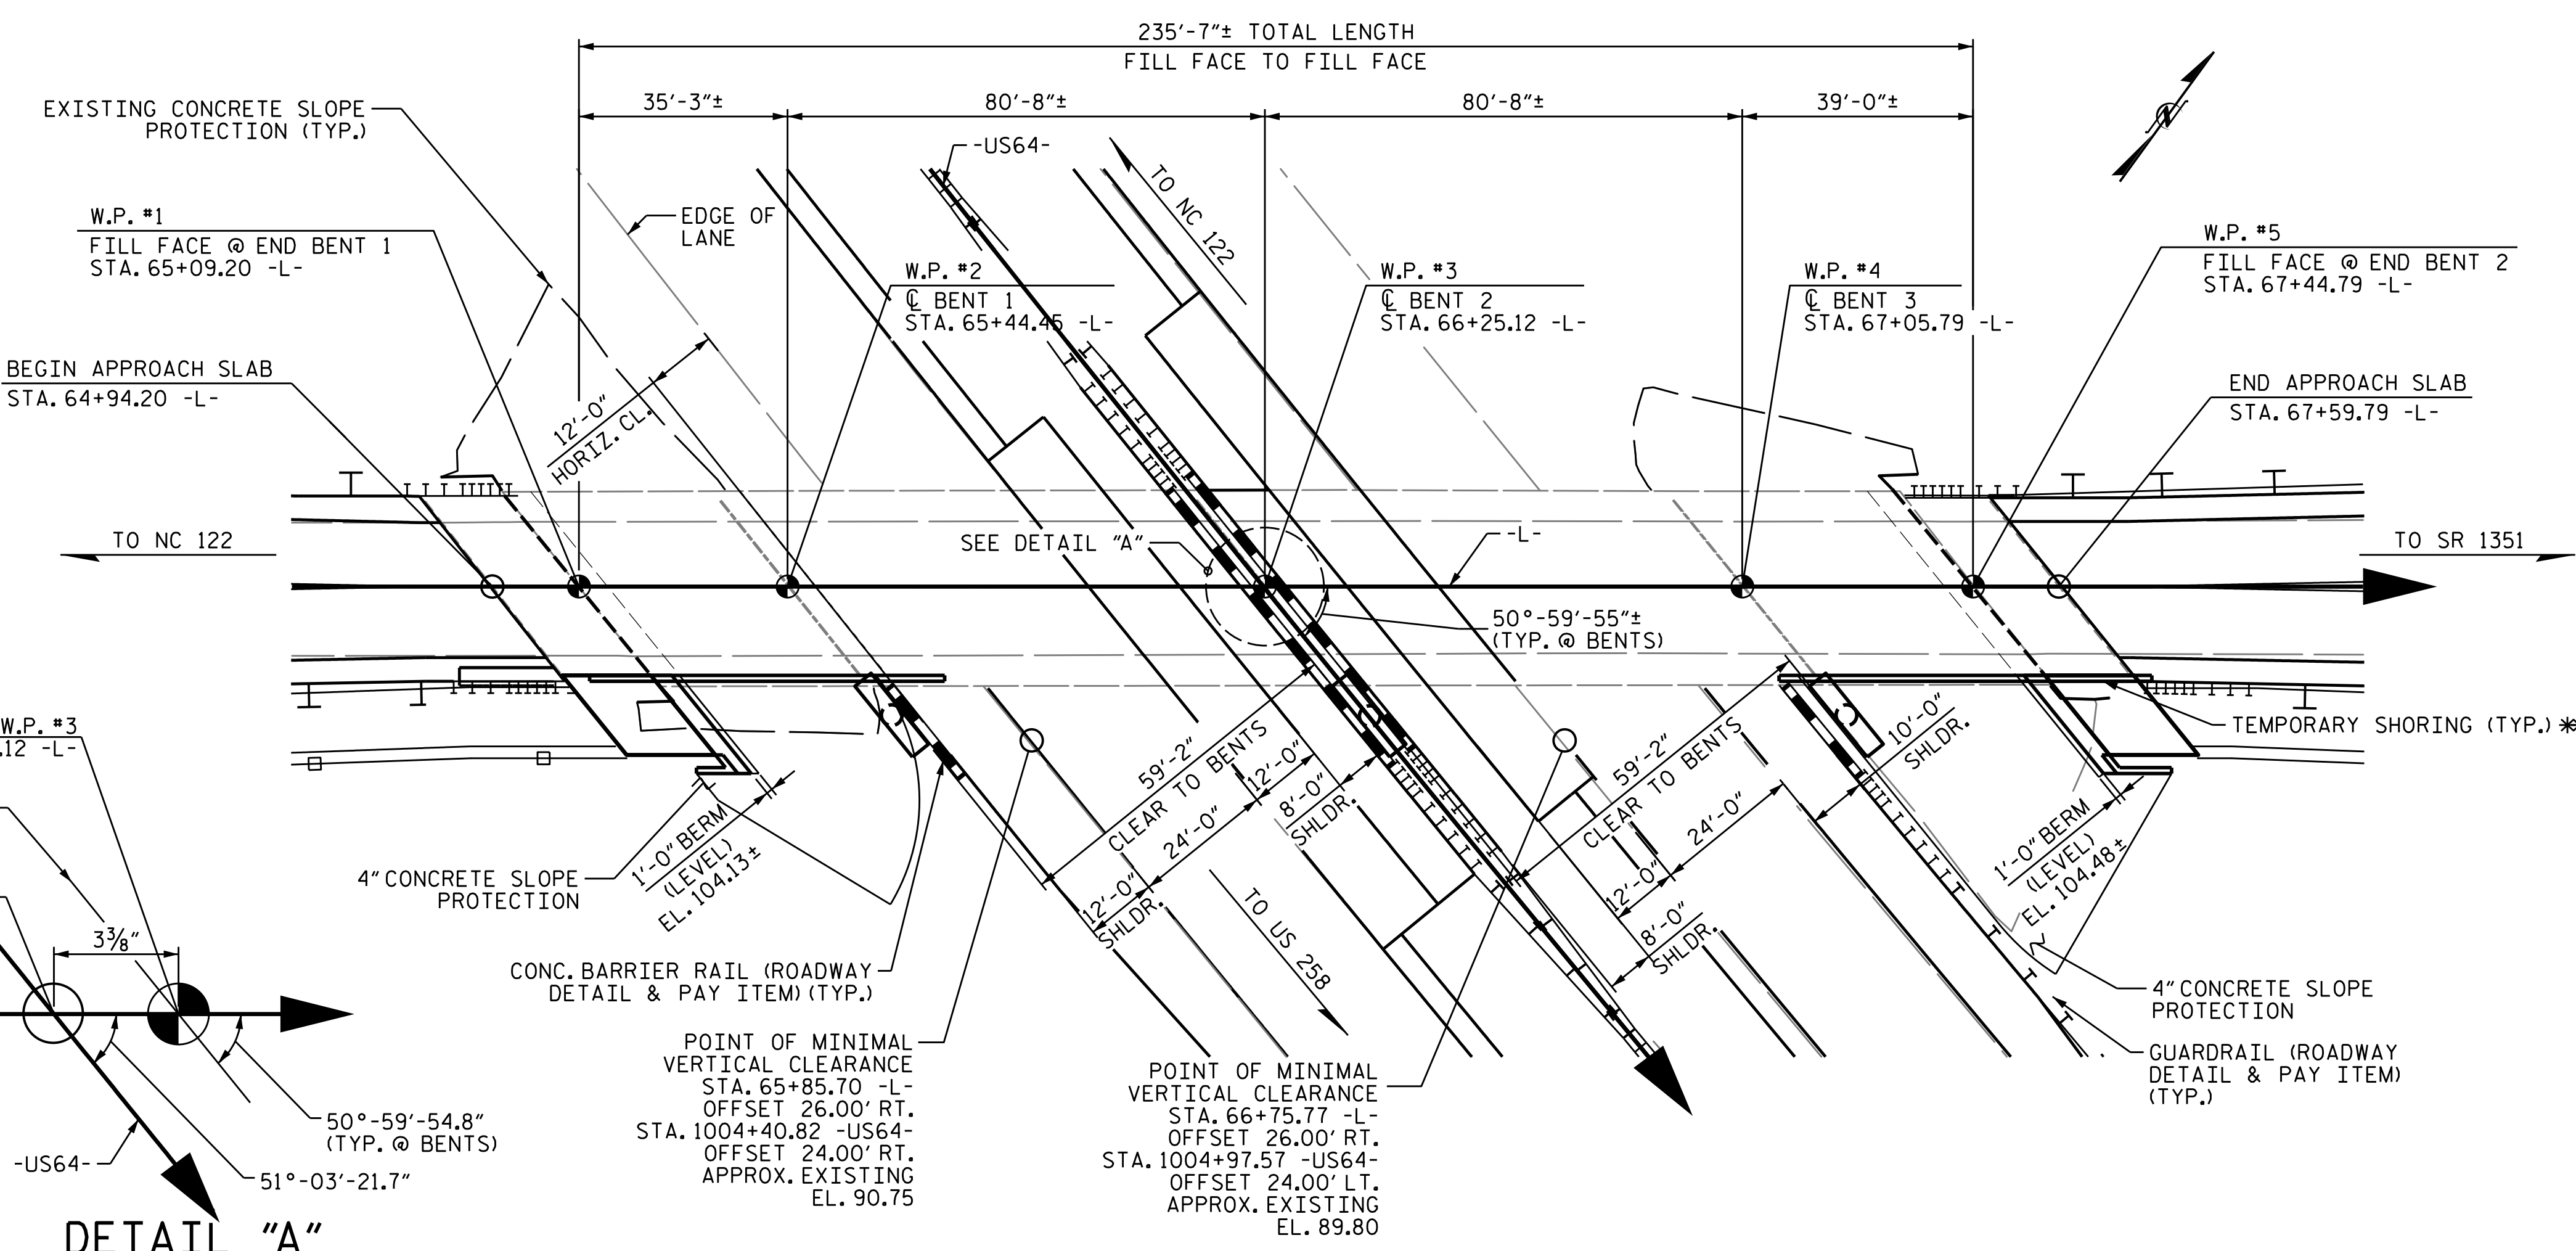

**\* TEMPORARY SHORING WILL BE REQUIRED TO REMAIN IN PLACE AND CUT OFF BELOW THE PAVEMENT STRUCTURE. USE PRECAST CONCRETE, STEEL PLATE LAGGING OR STEEL SHEET PILES FOR TEMPORARY SHORING.**


**DETAIL "A"**

**PLAN**  
(FOR CLARITY, PILES ARE NOT SHOWN IN PLAN VIEW)

PROJECT NO. U-4424  
EDGEcombe COUNTY  
STATION: 66+24.84 -L-  
1004+45.18 -US64-  
SHEET 1 OF 3 WIDENING & REHAB. BRIDGE 320152

STATE OF NORTH CAROLINA  
DEPARTMENT OF TRANSPORTATION  
RALEIGH

**GENERAL DRAWING**  
FOR BRIDGE WIDENING OVER US 64  
(-US64-) ON NC 111 (-L-)  
BETWEEN NC 122 AND SR 1351

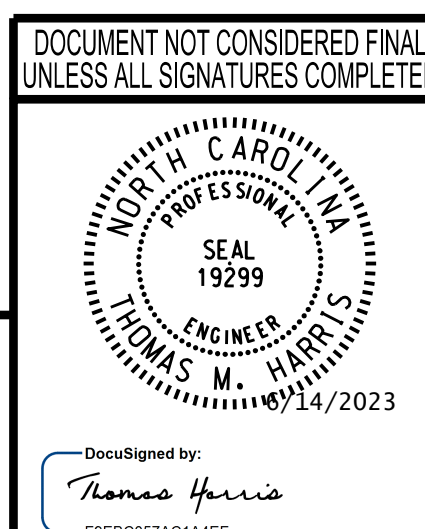

**wsp**  
WSP USA Inc.  
434 FAYETTEVILLE STREET  
SUITE 1500  
RALEIGH, NC 27601  
TEL: 1.919.836.4040  
LICENSE NO. P-0165

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	S-1
1			3			TOTAL SHEETS
2			4			37

6/14/2023 4:18:771-06 NCDOT\_NC\_111U-4424S\structures\Dr-off\ing\DGNS\401\_003\_U4424\_SML\_GD1\_001.dgn

DESIGNED BY: J. WHEATLEY DATE: MAR 2023  
DRAWN BY: J. WHEATLEY DATE: MAR 2023  
CHECKED BY: T. KIRSCHBAUM DATE: MAR 2023  
DESIGN ENGINEER OF RECORD: T. HARRIS DATE: MAR 2023